

SOLAR MODULE  
POLYCRYSTALLINE • 72 CELLS



**POSITIVE POWER**  
OUTPUT TOLERANCE



**30 YEAR LINEAR POWER WARRANTY**  
**20 YEAR PRODUCT WARRANTY**



**HAILSTORM** RESISTANCE



**STRONG YET ULTRA-LIGHT**  
ALUMINUM FRAME



**ANTI-REFLECTIVE GLASS**



**MODULE FIRE PERFORMANCE: 1**



**Poly 72 cells • OS - THE COMMERCIAL LINE**  
OS300P

PEIMAR polycrystalline solar panels made in Italy provide customers with a perfect combination of high-efficiency and versatility.

Thanks to the use of high-quality solar cells, our panels achieve outstanding performance and ensure maximum production output even under poor lighting and weather conditions. The strong yet ultra-light frames, available in silver or black make installation easy but robust in either residential, commercial or large-scale settings.

Cells



Type\_ **POLY 3BB - 4BB**  
Qty\_ **72 pcs**  
Dimensions\_ **156x156 mm**  
**6x6 inch**

Frame



**SILVER**

Backsheet



**WHITE**

## ELECTRICAL Characteristics (STC) \*

### OS300P

Nominal Output (Pmax)	300 W
Flash Test Power Tolerance	0/+5 W
Voltage at Pmax (Vmp)	36.0 V
Current at Pmax (Imp)	8.34 A
Open Circuit Voltage (Voc)	44.6 V
Short Circuit Current (Isc)	9.00 A
Maximum System Voltage	1000 V
Maximum Series Fuse Rating	15 A
Cell Efficiency	17.12 %
Module Efficiency	15.45 %

\*STC (Standard Test Condition): Irradiance 1000W/m<sup>2</sup>, Module Temperature 25°C, Air Mass 1.5

## MECHANICAL Characteristics

Solar Cells	72 (6x12) polycrystalline
Solar Cells Size	156x156 mm / 6x6"
Front Cover	3.2 mm / 0.12" thick, low iron tempered glass
Back Cover	TPT (Tedlar-PET-Tedlar)
Encapsulant	EVA (Ethylene vinyl acetate)
Frame	Anodized aluminium alloy, double wall
Frame finishing	Silver
Backsheet finishing	White
Diodes	3 Bypass diodes serviceable
Junction Box	IP65 rated
Connector	MC4 or compatible connector
Cables Length	900 mm / 35.4"
Cables Section	4.0 mm <sup>2</sup> / 0,006 in <sup>2</sup>
Dimensions	1957x992x40 mm / 77x39x1,57"
Weight	22.5 Kg / 49.6 lb
Max. Load	Certified to 5400 Pa

## TEMPERATURE Characteristics

NOCT**	45±2 °C
Temperature Coefficient of Pmax	-0.43 %/°C
Temperature Coefficient of Voc	-0.32 %/°C
Temperature Coefficient of Isc	0.047 %/°C
Operating Temperature	-40 °C ~ +85°C

\*\*NOCT: Nominal Operation Cell Temperature Sun 800W/m<sup>2</sup>; Air 20°C; Wind speed 1m/s

## PACKAGING \*\*\*


Pallet dimensions	2000x1100x1200 mm / 79x43x47"
Pieces per pallet	27
Weight	622 Kg / 1371 lb

\*\*\* Pallets can be stacked up to two

## CERTIFICATIONS



Fire Resistance Rating	1 (UNI 9177)
------------------------	--------------

## DIMENSIONS

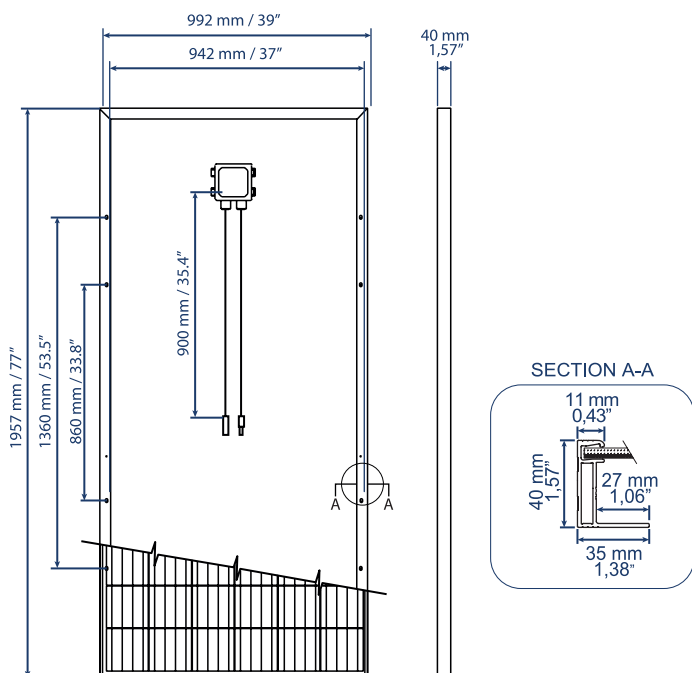

## CURRENT/VOLTAGE Characteristics

• Values apply to panel OS300P

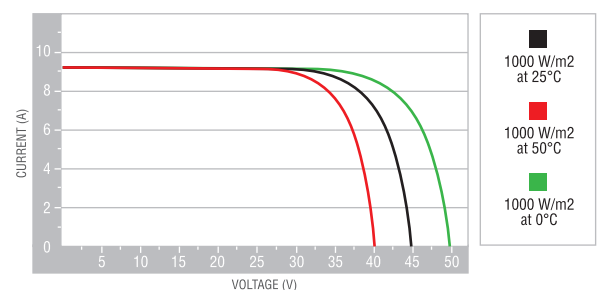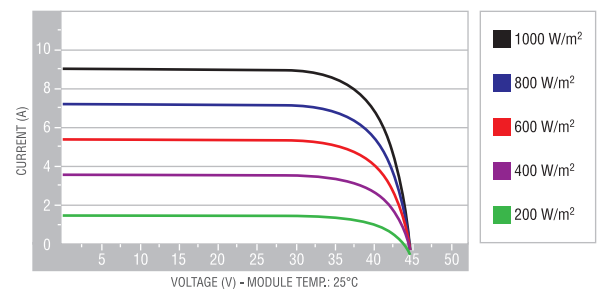

It is important to point out, that all technical specifications, information and figures contained in this datasheet are estimated values. Peimar reserves the right to change the technical specifications, information and figures contained in this document at any time and without notice.

ITALIA • Via Creta 72, 25124 Brescia • Tel. +39030223292  
 USA • 309 Fellowship Road, Mt Laurel, NJ 08054 • Phone: +1 856-642-4035  
 CHINA • Zhongminngda Plaza, 361000 Xiamen • Phone: +86-136-9696-2396

BRAZIL • Rua Cidade do Sol 5940, 59066-180 Pitimbu-Natal, RN • Phone: +55 84-3218-0348  
 AUSTRALIA • Hawthorn, 737 Burwood Rd, Melbourne VIC • Phone: 3123+613 8862 5487

/// PEIMAR

info@peimar.com  
 www.peimar.com