

# LG NeON<sup>®</sup> H+

Two technologies. One innovative solar module. LG NeON<sup>®</sup> H+Black features gapless technology for a stylish appearance as well as LG'S CELLO cell technology for maximum efficiency and performance.

## 405W

### FEATURES

**90.6%**  
in year 25

#### Enhanced Performance Warranty

After 25 years of use, the LG NeON<sup>®</sup> is guaranteed to provide at least 90.6% of initial performance.

**25**  
YEARS  
WARRANTY

#### Industry-Leading Product Warranty

LG offers an industry-leading 25-year limited product warranty.



#### Reliable Quality

Reliable and proven quality through rigorous testing.



#### Sleek Rooftop Design

Designed to make the entire module look black, providing a sleek, modern design that blends in seamlessly with the rooftop.



#### About LG Electronics

LG is transforming today's solar landscape, offering high-efficiency solar panels for customers who demand high performance, reliability and consistently strong energy yield from a brand they can trust. LG's modules feature high power outputs, outstanding durability, appealing aesthetics and high-efficiency



132 cell



## LG405N3K-V6

### General Data

Cell Properties (Material / Type)	Monocrystalline / N-type
Cell Maker	LG
Cell Configuration	132 Cells (6 x 22)
Number of Busbars	9 EA
Module Dimensions (L x W x H)	1,880 x 1,042 x 40 mm
Weight	19.7 kg
Glass (Material)	Tempered Glass with AR coating
Backsheet (Color)	Black
Frame (Material)	Anodized Aluminium
Junction Box (Protection Degree)	IP 68 with 3 Bypass Diodes
Cables (Length)	1,400 mm x 2 EA
Connector (Type / Maker)	MC4 / MC

### Certifications and Warranty

Certifications	IEC 61215-1/-1-1 / 2:2016, IEC 61730-1/2:2016, UL 61730-1:2017, UL 61730-2:2017
	ISO 9001, ISO 14001, ISO 50001
	OHSAS 18001
Salt Mist Corrosion Test	IEC 61701 : 2011 Severity 6
Ammonia Corrosion Test	IEC 62716 : 2013
Module Fire Performance	Type 2 (UL 61730)
Fire Rating	Class C (UL 790)
Solar Module Product Warranty	25 Years
Solar Module Output Warranty	Linear Warranty*

\* 1) First years : 98.5%, 2) After 1st year : -0.33%/year, 3) 90.6% for 25 years

### Temperature Characteristics


NMOT*	[°C]	42 ± 3
Pmax	[%/°C]	-0.33
Voc	[%/°C]	-0.26
Isc	[%/°C]	0.04

\* NMOT (Nominal Module Operating Temperature)  
: Irradiance 800W/m<sup>2</sup>, Ambient temperature 20°C, Wind speed 1m/s, Spectrum AM 1.5

### Electrical Properties (NMOT)

Model	LG405N3K-V6	
Maximum Power (Pmax)	[W]	306
MPP Voltage (Vmpp)	[V]	35.4
MPP Current (Impp)	[A]	8.64
Open Circuit Voltage (Voc)	[V]	42.7
Short Circuit Current (Isc)	[A]	9.02

### I-V Curves

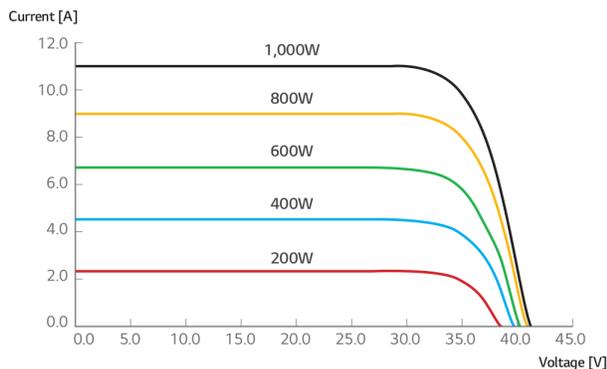

### Electrical Properties (STC\*)

Model	LG405N3K-V6	
Maximum Power (Pmax)	[W]	405
MPP Voltage (Vmpp)	[V]	37.6
MPP Current (Impp)	[A]	10.78
Open Circuit Voltage (Voc, ± 5%)	[V]	45.3
Short Circuit Current (Isc, ± 5%)	[A]	11.20
Module Efficiency	[%]	20.7
Power Tolerance	[%]	0 ~ +3

\* STC (Standard Test Condition)  
: Irradiance 1,000W/m<sup>2</sup>, Cell temperature 25°C, AM 1.5, Measure tolerance of Pmax : ±3%

### Operating Conditions

Operating Temperature	[°C]	-40 ~ +85
Maximum System Voltage	[V]	1,000
Maximum Series Fuse Rating	[A]	20
Mechanical Test Load* (Front)	[Pa]	5,400
Mechanical Test Load* (Rear)	[Pa]	4,000

\* Based on IEC 61215-2 : 2016 (Test Load = Design Load x Safety Factor(1.5))  
※ Mechanical Test Loads 6,000 Pa / 5,400 Pa based on IEC 61215 : 2005

### Packaging Configuration

Number of Modules Per Pallet	[EA]	25
Number of Modules per 40' Container	[EA]	600
Number of Modules per 53' Container	[EA]	TBD
Packaging Box Dimensions (L x W x H)	[mm]	1,960 x 1,120 x 1,221
Packaging Box Dimensions (L x W x H)	[in]	TBD
Packaging Box Gross Weight	[kg]	530
Packaging Box Gross Weight	[lb]	TBD

### Dimensions (mm/inch)

