

Powerwall 3

Power Everything

Powerwall 3 is a fully integrated solar and battery system, designed to accelerate the transition to sustainable energy. Customers can receive whole home backup, cost savings, and energy independence by producing and consuming their own energy while participating in grid services. Once installed, customers can manage their system using the Tesla App to customize system behavior to meet their energy goals.

Powerwall 3 achieves this by supporting up to 20 kW DC of solar and providing up to 11.5 kW AC of continuous power per unit. It has the ability to start heavy loads rated up to 185 LRA, meaning a single unit can support the power needs of most homes. Powerwall 3 Expansions make it easier and more affordable to scale up customers' systems to meet their current or future needs. Powerwall 3 is designed for fast and efficient installations, modular system expansion, and simple connection to any electrical service.



Powerwall 3 Technical Specifications

System Technical Specifications

| | | | | |
|--|--|----------|-----------|-----------|
| Model Number | 1707000-xx-y | | | |
| Nominal Grid Voltage (Input & Output) | 120/240 VAC | | | |
| Grid Type | Split phase | | | |
| Frequency | 60 Hz | | | |
| Nominal Battery Energy | 13.5 kWh AC ¹ | | | |
| Nominal Output Power (AC) | 5.8 kW | 7.6 kW | 10 kW | 11.5 kW |
| Maximum Apparent Power | 5,800 VA | 7,600 VA | 10,000 VA | 11,500 VA |
| Maximum Continuous Current | 24 A | 31.7 A | 41.7 A | 48 A |
| Overcurrent Protection Device ² | 30 A | 40 A | 60 A | 60 A |
| Configurable Maximum Continuous Discharge Power Off-Grid (PV Only, -20°C to 25°C) | 15.4 kW ³ | | | |
| Maximum Continuous Charge Current / Power (Powerwall 3 only) | 20.8 A AC / 5 kW | | | |
| Maximum Continuous Charge Current / Power (Powerwall 3 with up to (3) Expansion units) | 33.3 A AC / 8 kW | | | |
| Output Power Factor Rating | 0 – 1 (Grid Code configurable) | | | |
| Maximum Output Fault Current (1 s) | 160 A | | | |
| Maximum Short-Circuit Current Rating | 10 kA | | | |
| Load Start Capability | 185 LRA | | | |
| Solar to Battery to Home/Grid Efficiency | 89% ¹⁴ | | | |
| Solar to Home/Grid Efficiency | 97.5% ⁵ | | | |
| Power Scalability | Up to 4 Powerwall 3 units supported | | | |
| Energy Scalability | Up to 3 Expansion units (for a maximum total of 7 units) | | | |
| Supported Islanding Devices | Gateway 3, Backup Switch, Backup Gateway 2 | | | |
| Connectivity | Wi-Fi (2.4 and 5 GHz), Ethernet, Cellular (LTE/4G ⁶) | | | |
| Hardware Interface | Dry contact relay, Rapid Shutdown (RSD) certified switch and 2-pin connector, RS-485 for meters | | | |
| AC Metering | Revenue Grade (+/- 0.5%, ANSI C12.20) | | | |
| Protections | Integrated arc fault circuit interrupter (AFCI), Isolation Monitor Interrupter (IMI), PV Rapid Shutdown (RSD) using Tesla Mid-Circuit Interrupters | | | |
| Customer Interface | Tesla Mobile App | | | |
| Warranty | 10 years | | | |

¹Values provided for 25°C (77°F), at beginning of life. 3.3 kW charge/discharge power.

²See [Powerwall 3 Installation Manual](#) for fuse requirements if using fuse for overcurrent protection.

³15.4kW off-grid maximum continuous discharge power is only available if on-grid rating is 11.5 kW. If enabled, Powerwall 3 must be installed with an 80 A breaker and appropriately sized conductors.

⁴Typical solar shifting use case.

⁵Tested using CEC weighted efficiency methodology.

⁶The customer is expected to provide internet connectivity for Powerwall 3; cellular should not be used as the primary mode of connectivity. Cellular connectivity subject to network operator service coverage and signal strength.

Powerwall 3 Technical Specifications

Solar Technical Specifications

| | |
|---|---------------------|
| Maximum Solar STC Input | 20 kW |
| Withstand Voltage | 600 V DC |
| PV DC Input Voltage Range | 60 — 550 V DC |
| PV DC MPPT Voltage Range | 60 — 480 V DC |
| MPPTs | 6 |
| Maximum Current per MPPT (I_{MP}) | 15 A ^{7,8} |
| Maximum Short Circuit Current per MPPT (I_{SC}) | 19 A ⁸ |

⁷Only applicable to Powerwall 3 units with 15 A I_{MP} on the product label. Otherwise, Powerwall 3 has an I_{MP} of 13 A.

⁸When PV strings are combined on the roof and the DC input current exceeds the MPPT rating, a jumper can be used to combine two MPPTs into a single input to intake DC current up to 30 A I_{MP} / 38 A I_{SC} (or 26 A I_{MP} / 30 A I_{SC} if Powerwall 3 is labeled with 13 A I_{MP} / 15 A I_{SC}).

Environmental Specifications

| | |
|-------------------------|--|
| Operating Temperature | -20°C to 50°C (-4°F to 122°F) ⁹ |
| Operating Humidity (RH) | Up to 100%, condensing |
| Storage Temperature | -20°C to 30°C (-4°F to 86°F), up to 95% RH, non-condensing, State of Energy (SOE): 25% initial |
| Maximum Elevation | 3000 m (9843 ft) |
| Environment | Indoor and outdoor rated |
| Enclosure Rating | NEMA 3R |
| Ingress Rating | IP67 (Battery & Power Electronics) IP55 (Wiring Compartment) |
| Pollution Rating | PD3 |
| Operating Noise @ 1 m | < 50 db(A) typical < 62 db(A) maximum |

⁹Performance may be de-rated at operating temperatures above 40°C (104°F).

Compliance Information


| | |
|-----------------|--|
| Certifications | UL 1741, UL 9540, UL 9540A, UL 3741, UL 1741 PCS, UL 1741 SA, UL 1741 SB, UL 1973, UL 1699B, UL 1998, CSA C22.2 No. 0.8, CSA C22.2 No. 107.1, CSA C22.2 No. 330, CSA 22.3 No. 9, IEEE 1547, IEEE 1547A, IEEE 1547.1, CA Rule No.21 |
| Grid Connection | United States and Canada |
| Emissions | FCC Part 15 Class B, ICES 003 |
| Environmental | RoHS Directive 2011/65/EU |
| Seismic | AC156, IEEE 693-2005 (high) |
| Fire Testing | Meets the unit level performance criteria of UL 9540A |

Powerwall 3 Technical Specifications

Mechanical Specifications

| | |
|--------------------------------|--|
| Dimensions | 1105 x 609 x 193 mm (43.5 x 24 x 7.6 in) ¹⁰ |
| Total Weight of Installed Unit | 132 kg (291.2 lb) |
| Weight of Powerwall 3 | 124 kg (272.5 lb) |
| Weight of Glass Front Cover | 6.5 kg (14.5 lb) |
| Weight of Wall Bracket | 1.9 kg (4.2 lb) |
| Mounting Options | Floor or wall mount |

¹⁰These dimensions include the glass front cover being installed on Powerwall 3.

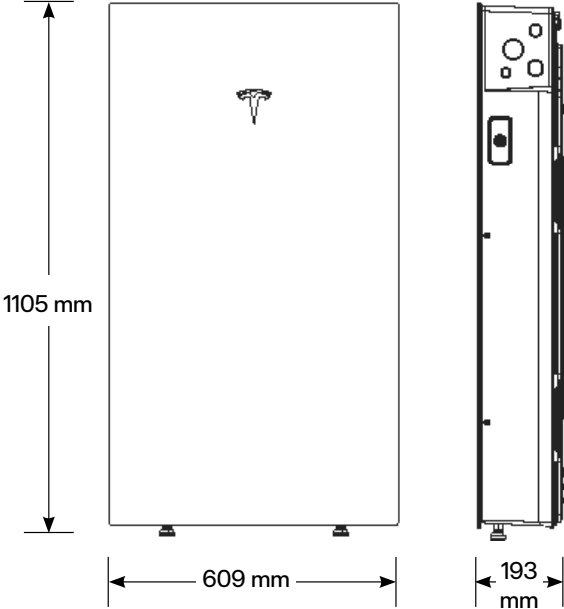

Powerwall 3 Expansion Technical Specifications

Battery Technical Specifications

| | |
|------------------------|----------------------------|
| Model Number | 1807000-xx-y |
| Nominal Battery Energy | 13.5 kWh |
| Voltage Range | 52 - 92 V DC ¹¹ |

¹¹ Powerwall 3 Expansion units are connected in parallel and are not field serviceable.

Environmental Specifications

| | |
|-------------------------|--|
| Operating Temperature | -20°C to 50°C (-4°F to 122°F) ¹² |
| Operating Humidity (RH) | Up to 100%, condensing |
| Storage Temperature | -20°C to 30°C (-4°F to 86°F), up to 95% RH, non-condensing, State of Energy (SOE): 25% initial |
| Maximum Elevation | 3000 m (9843 ft) |
| Environment | Indoor and outdoor rated |
| Enclosure Rating | NEMA 3R |
| Ingress Rating | IP67 |
| Pollution Rating | PD3 |


¹² Performance may be de-rated at operating temperatures above 40°C (104°F).

Compliance Information

| | |
|----------------|------------------|
| Certifications | UL 1973, UL 9540 |
|----------------|------------------|

Mechanical Specifications

| | |
|---|---|
| Dimensions | 1105 x 609 x 168 mm (43.5 x 24 x 6.6 in) ¹³ |
| Total Weight of Wall-Mounted Expansion Unit | 118.5 kg (261.2 lb) |
| Weight of Expansion Unit | 110 kg (242.5 lb) |
| Weight of Glass Front Cover | 6.5 kg (14.5 lb) |
| Weight of Wall Bracket | 1.9 kg (4.2 lb) |
| Weight of Expansion Accessories | 0.7 kg (1.5 lb) |
| Mounting Options | Floor or wall mount |
| Stacking Capability (Floor Mount Only) | Up to (3) Expansion units behind a Powerwall 3 |
| Compatibility with Other Systems | Only compatible with Powerwall 3 |
| Connection to Powerwall 3 or Expansions | Powerwall 3 Expansion harness ¹⁴ |

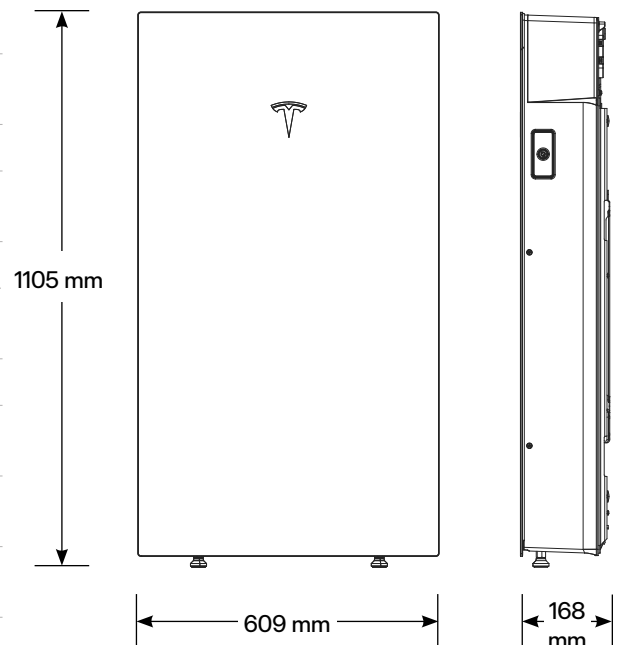

¹³ These dimensions include the glass front cover being installed on Powerwall 3 Expansion.

¹⁴ The Powerwall 3 Expansion harness is a listed component of the UL 9540 certification.

Solar Shutdown Device Technical Specifications

The Solar Shutdown Device is a Mid-Circuit Interrupter (MCI) and is integral to the rapid shutdown (RSD) function required for rooftop PV systems in accordance with Article 690 of the NEC. When paired with Powerwall 3, solar array shutdown is initiated by an External System Shutdown Switch or the On/Off Enable switch located on Powerwall 3. Systems not subject to rapid shutdown requirements must still install one or more MCIs for functional purposes; see the Powerwall 3 installation manual for details.

Electrical Specifications

| Model | MCI-1 | MCI-2 | MCI-2 High Current |
|--|----------|-------------------------|-------------------------|
| Nominal Input DC Current Rating (I_{MP}) | 13 A | 13 A | 15 A |
| Maximum Input Short Circuit Current (I_{SC}) | 19 A | 17 A | 19 A |
| Maximum System Voltage | 600 V DC | 1000 V DC ¹⁵ | 1000 V DC ¹⁵ |
| Maximum Disconnect Voltage ¹⁶ | 600 V DC | 165 V DC | 165 V DC |

¹⁵ Maximum System Voltage is limited by Powerwall to 600 V DC.

¹⁶ Maximum Disconnect Voltage is the maximum voltage allowed across each MCI in the open position (Rapid Shutdown Initiated). An individual MCI-2 has a voltage rating of 165V but in combination (connected in the same string) their voltage ratings are additive.

RSD Module Performance

| | |
|--------------------------------------|-----------------------|
| Maximum Number of Devices per String | 5 |
| Control | Power Line Excitation |
| Passive State | Normally Open |
| Maximum Power Consumption | 7 W |
| Warranty | 25 years |

Environmental Specifications

| | | |
|-----------------------|-----------------------------------|-----------------------------------|
| Operating Temperature | -40°C to 50°C (-40°F to 122°F) | -45°C to 70°C (-49°F to 158°F) |
| Storage Temperature | -30°C to 70°C (-22°F to 158°F) | -30°C to 70°C (-22°F to 158°F) |
| Enclosure Rating | NEMA 4X / IP65 | |

Mechanical Specifications

| | | |
|------------------------|---|--|
| Electrical Connections | MC4 Connector | |
| Housing | Plastic | |
| Dimensions | 125 x 150 x 22 mm (5 x 6 x 1 in) | 173 x 45 x 22 mm (6.8 x 1.8 x 1 in) |
| Weight | 350 g (0.77 lb) | 120 g (0.26 lb) |
| Mounting Options | ZEP Home Run Clip M4 Screw (#10) M8 Bolt (5/16") Nail / Wood screw | Wire Clip |

Compliance Information

| | |
|-----------------------|--|
| Certifications | UL 1741 PVRSE, UL 3741, PVRSA (Photovoltaic Rapid Shutdown Array) |
| RSD Initiation Method | External System Shutdown Switch or Powerwall 3 Enable Switch |

UL 3741 PV Hazard Control (and PVRSA) Compatibility

See [UL 3741 Application Addendum](#)

Gateway 3

Tesla Gateway 3 controls connection to the grid in a Powerwall system, automatically detecting outages and providing seamless transition to backup power. It provides energy monitoring that is used by Powerwall for solar self-consumption, time-based control, and backup operation.

Performance Specifications

| | | | |
|---|--|--------------------------------------|--|
| Model Number | 1841000-x1-y | AC Meter | +/- 0.5% |
| Nominal Grid Voltage | 120/240 V AC | Communication | CAN |
| Grid Configuration | Split phase | User Interface | Tesla App |
| Grid Frequency | 60 Hz | Backup Transition | Automatic disconnect for seamless backup |
| Continuous Current Rating | 200 A | Overcurrent Protection Device | 100–200 A Service entrance rated Eaton CSR, BWH, or BW, or Square D QOM breakers |
| Maximum Supply Short Circuit Current | 22 kA with Square D or Eaton main breaker 25 kA with Eaton main breaker ¹⁷ | Internal Panelboard | 200 A 8-space/16 circuit breakers Eaton BR, Siemens QP, or Square D HOM breakers rated to 10–125A |
| IEC Protective Class | Class I | Warranty | 10 years |
| Overvoltage Category | Category IV | | |

¹⁷ Only Eaton CSR or BWH main breakers are 25 kA rated.

Environmental Specifications


| | |
|--------------------------------|-------------------------------|
| Operating Temperature | -20°C to 50°C (-4°F to 122°F) |
| Operating Humidity (RH) | Up to 100%, condensing |
| Maximum Elevation | 3000 m (9843 ft) |
| Environment | Indoor and outdoor rated |
| Enclosure Type | NEMA 3R |

Compliance Information

| | |
|-----------------------|--|
| Certifications | UL 67, UL 869A, UL 916, UL 1741 PCS, CSA 22.2 107.1, CSA 22.2 29 |
| Emissions | FCC Part 15, Class B, ICES 003 |

Mechanical Specifications

| | |
|-------------------------|--|
| Dimensions | 660 x 411 x 149 mm (26 x 16 x 6 in) |
| Weight | 16.3 kg (36 lb) |
| Mounting options | Wall mount |

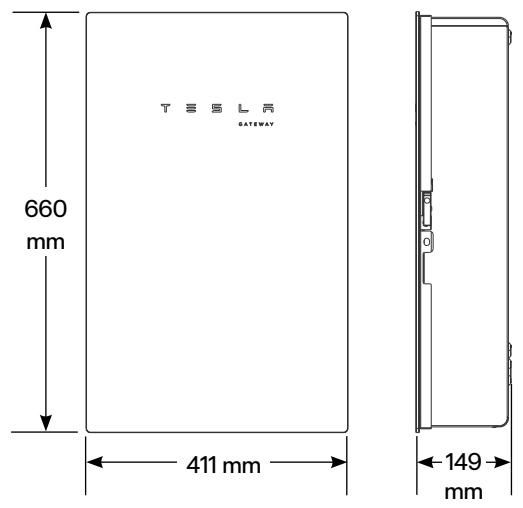

Backup Switch

The Tesla Backup Switch controls connection to the grid in a Powerwall system, and can be easily installed behind the utility meter or in a standalone meter panel downstream of the utility meter.

The Backup Switch automatically detects grid outages, providing a seamless transition to backup power. It communicates directly with Powerwall, allowing home energy usage monitoring from any mobile device with the Tesla app.

Performance Specifications

| | |
|--------------------------------------|----------------------------------|
| Model Number | 1624171-xx-y |
| Continuous Load Rating | 200 A, 120/240 V split phase |
| Maximum Supply Short Circuit Current | 22 kA with breaker ¹⁸ |
| Communication | CAN |
| AC Meter | +/- 0.5% |
| Expected Service Life | 21 years |
| Warranty | 10 years |

¹⁸ Breaker maximum supply short circuit current rating must be equal to or greater than the available fault current.

Environmental Specifications

| | |
|-----------------------|--------------------------------|
| Operating Temperature | -40°C to 50°C (-40°F to 122°F) |
| Storage Temperature | -40°C to 85°C (-40°F to 185°F) |
| Enclosure Rating | NEMA 3R |
| Pollution Rating | PD3 |


Compliance Information

| | |
|------------------|---|
| Safety Standards | USA: UL 414, UL 414 SB, UL 2735, UL 916, CA Prop 65 |
| Emissions | FCC Part 15, Class B, ICES 003 |

Mechanical Specifications

| | |
|--------------------------------|---|
| Dimensions | 176 x 205 x 74 mm (6.9 x 8.1 x 2.9 in) |
| Weight | 2.8 lb |
| Meter and Socket Compatibility | ANSI Type 2S, ringless or ring type |
| External Service Interface | Contactor manual override ¹⁹ Reset button |
| Conduit Compatibility | 1/2-inch NPT |

¹⁹ Manually overrides the contactor position during a service event.

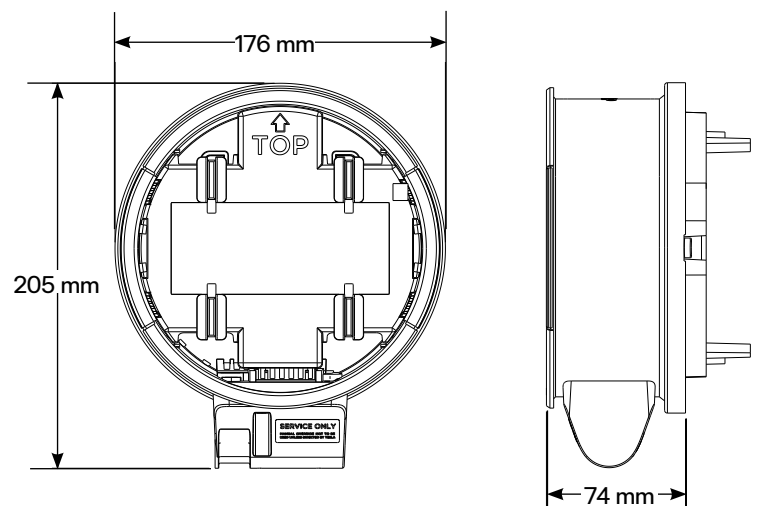

Backup Gateway 2

Backup Gateway 2 controls connection to the grid when paired with Powerwall 3, automatically detecting outages and providing seamless transition to backup power. Backup Gateway 2 also provides energy metering for solar self-consumption, time-based control, and backup operation.

In this system configuration, Powerwall 3 acts as the Site Controller, with the Backup Gateway 2 Site Controller disabled.

Performance Specifications

| | | | |
|---|-------------------------------------|-------------------------------------|--|
| Model Number | 1232100-xx-y | Internal Primary AC Meter | +/- 0.2% |
| AC Voltage (Nominal) | 120/240 V | Internal Auxiliary AC Meter | +/- 2% |
| Feed-in Type | Split phase | Backup Transition | Automatic disconnect for seamless backup |
| Grid Frequency | 60 Hz | Modularity | Supports up to 10 AC-coupled Powerwalls |
| Current Rating | 200 A | Optional Internal Panelboard | 200 A 6-space / 12 circuit breakers Siemens QP or Square D HOM breakers rated 10 - 80A or Eaton BR breakers rated 10 - 125A |
| Maximum Supply Short Circuit Current | 10 kA ²⁰ | Warranty | 10 years |
| Overcurrent Protection Device | 100 - 200 A, Service entrance rated | | |
| Overvoltage Category | Category IV | | |

²⁰When protected by Class J fuses, Backup Gateway 2 is suitable for use in circuits capable of delivering not more than 22kA symmetrical amperes.

Environmental Specifications


| | |
|--------------------------------|-------------------------------|
| Operating Temperature | -20°C to 50°C (-4°F to 122°F) |
| Operating Humidity (RH) | Up to 100%, condensing |
| Maximum Elevation | 3000 m (9843 ft) |
| Environment | Indoor and outdoor rated |
| Enclosure Type | NEMA 3R |

Compliance Information

| | |
|-----------------------|--|
| Certifications | UL 67, UL 869A, UL 916, UL 1741 PCS, CSA 22.2 0.19, CSA 22.2 205 |
| Emissions | FCC Part 15, Class B, ICES 003 |

Mechanical Specifications


| | |
|-------------------------|--|
| Dimensions | 660 x 411 x 149 mm (26 x 16 x 6 in) |
| Weight | 20.4 kg (45 lb) |
| Mounting options | Wall mount, Semi-flush mount |

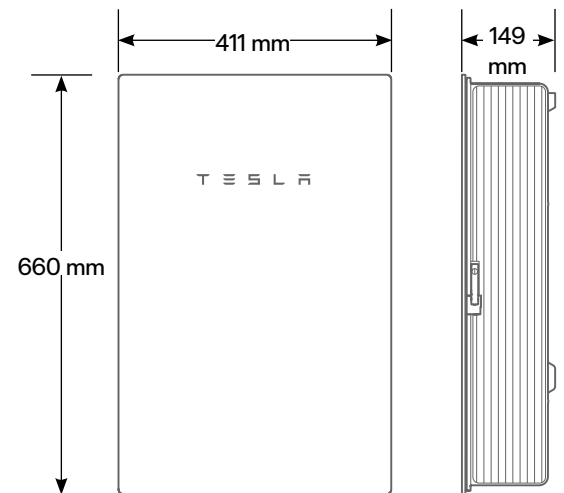

Powerwall 3 Example System Configurations


Powerwall 3 with Gateway 3

Whole Home Backup

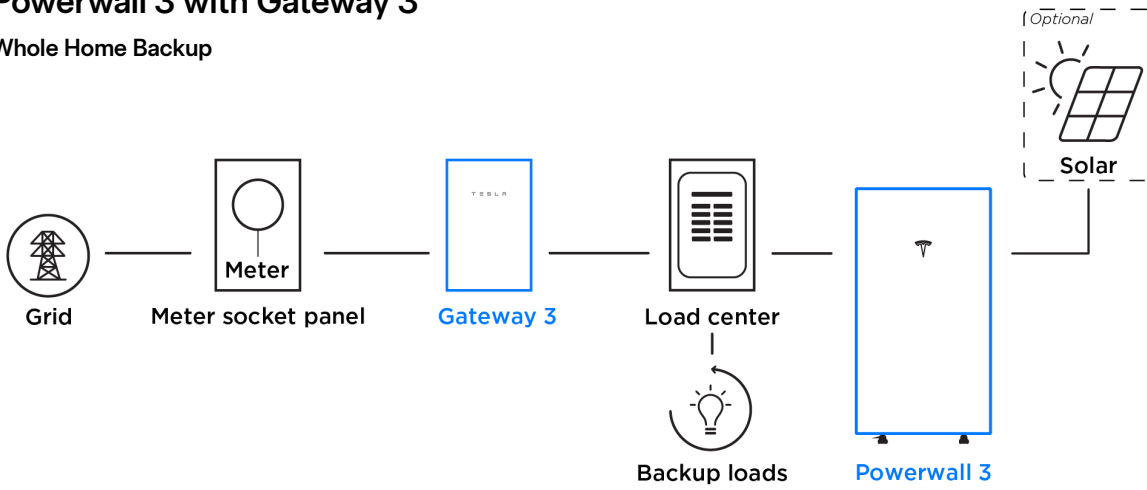


Powerwall 3 with Backup Switch

Whole Home Backup

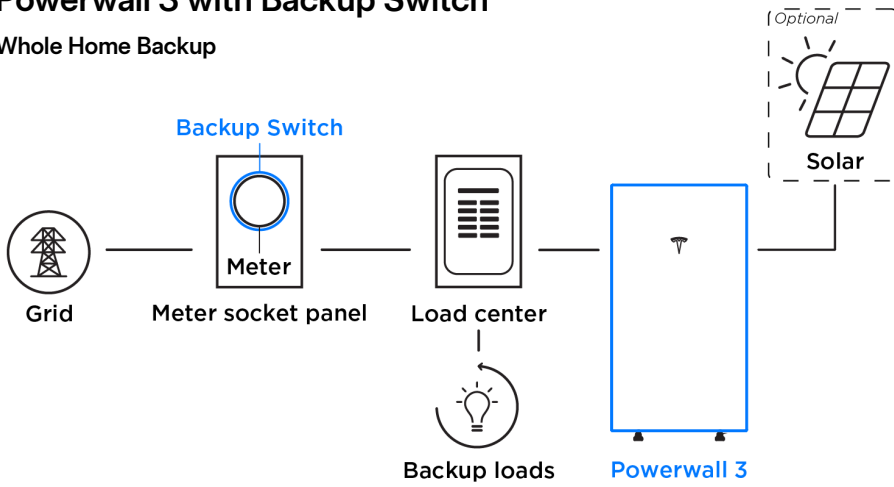

Powerwall 3 with Backup Gateway 2


Partial Home Backup

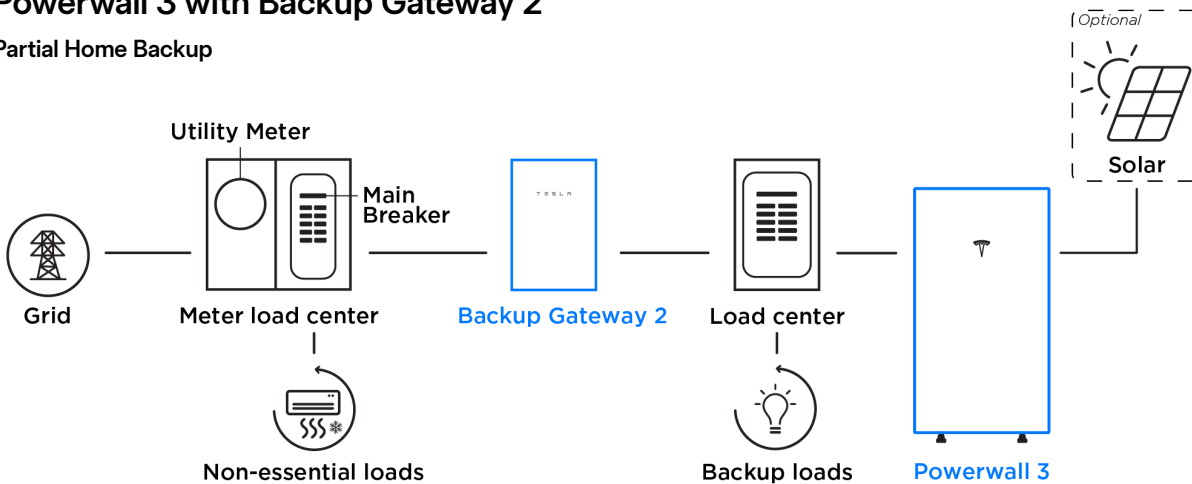

Powerwall 3 Example System Configurations

Powerwall 3 with Gateway 3

(1) Powerwall 3 with (3) Expansion Units

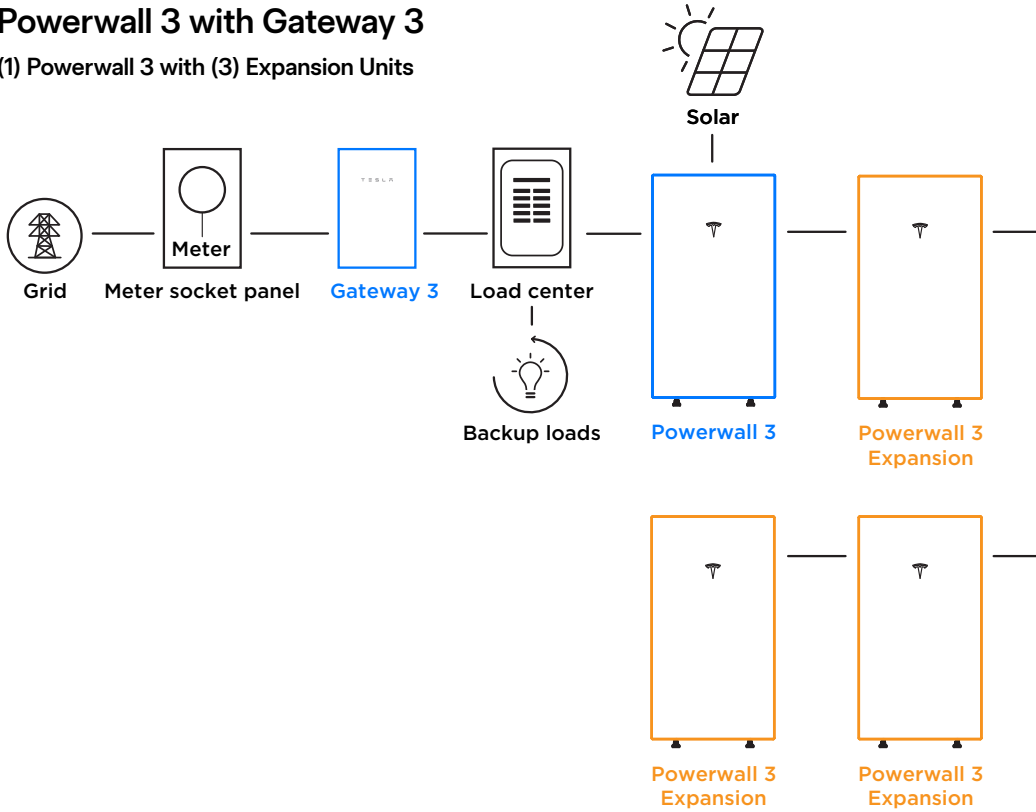

Powerwall 3 with Backup Switch

(4) Powerwall 3 Units with (3) Expansion Units (Maximum System Size)

