

CertainTeed Solar

APOLLO[®] II SOLAR ROOFING SYSTEM



See reverse for
product specifications



A high-efficiency solar shingle designed for integration with all asphalt shingle roofs.

Features and Benefits

- **Functional:** The Apollo II system functions as both a roof and a solar array
- **Beautiful:** Black on black construction and a slim profile provides a clean integrated aesthetic
- **Efficient:** Modules use 14 high-efficiency monocrystalline solar cells
- **Strong:** Mechanical load rating of 250 lbs per square foot
- **Lightweight:** Weighs about as much as a typical asphalt shingle roof
- **Wind Resistant:** Tested to the highest wind standards and backed by a 110mph wind warranty
- **Water Shedding:** Built-in water management features
- **Easy to Install:** Open space under the modules and built-in wire clips allow for easy wire management and installation



Each System Includes

- 63 watt, high-efficiency monocrystalline modules
- Waterproof and fire-resistant underlayment membranes
- Flashing accessories
- Starter strip and wind clips
- String inverter
- Home run wiring
- Monitoring system (optional)




MADE IN USA

using foreign and domestic components

CertainTeed
SAINT-GOBAIN

Dimensions

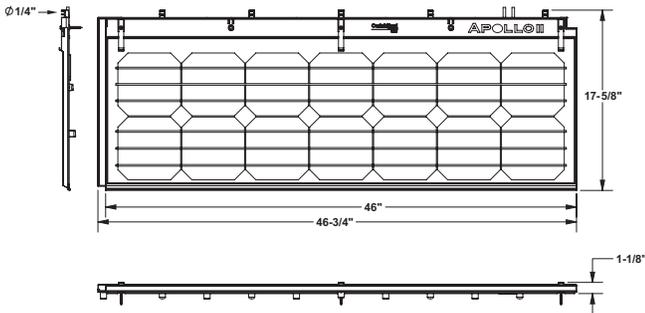

Electrical Characteristics

Standard Test Conditions: 25 C, 1kW/m², AM 1.5

Maximum Power (Pmax)	63W
Maximum Power Voltage (Vmp)	7.27 V
Maximum Power Current (Imp)	8.67 A
Open Circuit Voltage (Voc)	9.28 V
Short Circuit Current (Isc)	9.25 A
Maximum System Voltage	600 V
Series Fuse Rating	15 A
Performance Tolerance	+/- 3%
Conversion Efficiency	15.4%
Power Temp. Coefficient (Ptmp)	-0.45%/°C
Voltage Temp. Coefficient (Vtoc)	-0.30%/°C
Normal Operating Cell Temp. (NOCT)	55.6 °C
PTC Rating	53.5W

Absolute Maximum Ratings

Parameters	Rating	Unit
Operating Temperature	-40 to +90	°C
Storage Temperature	-40 to +90	°C
Dielectric Voltage Withstood	600 Max	V-DC

Mechanical Characteristics

Exposed Area	46" x 13-3/4"
Weight	12 lbs (2.7 lbs per sq ft)
Cell	Monocrystalline
No. of cells and connections	14 in series
Bypass Diode	1 per panel
Load Rating	250 lbs/sq ft
Wiring	14 AWG PV wire
Connectors	MC4-EVO 3

Warranty and Certifications

Warranty	25 year limited power warranty 10 year limited product warranty
----------	--

Certifications	UL 1703 UL 790 Class A Fire Rating ASTM D3161 Class F IEC 61215 California CEC Listed
----------------	---



CertainTeed Corporation

ROOFING • SIDING • TRIM • DECKING • RAILING • FENCE • GYPSUM • CEILINGS • INSULATION

20 Moores Road Malvern, Pa 19355 Professional: 800-233-8990 Consumer: 800-782-8777 certainteed.com