



Solaria PowerXT®-355R-AC

The Solaria PowerXT AC Module combines the latest cutting-edge microinverter technology from Enphase with the premium high-efficiency and superior aesthetics of the Solaria PowerXT Module. Utilizing the latest Enphase IQ7+ platform the PowerXT AC Module puts combines aesthetics and performance into an elegant product that reduces installation time by combining the inverter, module and monitoring.

Achieving up to 20% efficiency, Solaria PowerXT solar modules are one of the highest power AC modules in the residential solar market. Compared to conventional modules, Solaria PowerXT modules have fewer gaps between the solar cells; this leads to higher power and superior aesthetics. Solaria PowerXT pure black residential modules are manufactured with black backsheet and frames, giving them a striking appearance.

Higher Efficiency, Higher Power

Solaria PowerXT modules achieve up to 20% efficiency; conventional modules achieve 15% – 17% efficiency. Combined with Enphase IQ7+ microinverter, the Solaria PowerXT AC Module is one of the highest power and most efficient AC modules available.

Easy to Install

The integrated Enphase IQ7+ microinverter reduces installation costs due to fewer balance of system components, improved two-wire cabling and compliance with NEC 2014 & 2017 rapid shutdown requirements.

Smart Grid Ready

Meets CA Rule 21 and complies with advanced grid support, voltage and frequency ride-through requirements. Remotely updates to respond to changing grid requirements and is configurable for varying grid profiles.

Improved Aesthetics

Compared to conventional modules, the Solaria PowerXT AC Module has a more uniform appearance and superior aesthetics.

Durability and Reliability

Industry leading 25 year warranty with a million hours of microinverter testing.



About Solaria

Established in 2000, The Solaria Corporation has created one of the industry's most respected IP portfolios, with over 100 patents encompassing materials, processes, applications, products, manufacturing automation and equipment. Headquartered in Oakland, CA, Solaria has developed a technology platform that unlocks the potential of solar energy.



DC Input Performance at STC (1000W/m², 25° C, AM 1.5)

| Solaria PowerXT- | | 350R-AC | 355R-AC |
|--|-----|---------|---------|
| Max Power (P _{max}) | [W] | 350 | 355 |
| Efficiency | [%] | 19.4 | 19.6 |
| Open Circuit Voltage (V _{oc}) | [V] | 47.1 | 47.4 |
| Short Circuit Current (I _{sc}) | [A] | 9.49 | 9.53 |
| Max Power Voltage (V _{mp}) | [V] | 38.8 | 39.1 |
| Max Power Current (I _{mp}) | [A] | 9.02 | 9.09 |


AC Output Data: Enphase IQ7+ Microinverter

| | | |
|---------------------------|------|-----------------------------|
| Peak Output Power | [VA] | 295 |
| Max Continuous Power | [VA] | 290 |
| Nominal Voltage | [V] | 240 |
| Max Continuous Current | [A] | 1.21 |
| Nominal Frequency | [Hz] | 60 |
| Extended Frequency Range | [Hz] | 47-68 |
| Peak Efficiency | [%] | 97.5 |
| Power Factor / Adjustable | [#] | 0.85 leading...0.85 lagging |
| Max Branch Circuit | [A] | 20 |
| Max Modules/Circuit | [#] | 13 |
| Operating Temperature | [C] | -40 to +65 |


Features

| | |
|---------------------|---|
| Communication | Power line |
| Monitoring | Enlighten Manager and MyEnlighten options Compatible with Enphase IQ Envoy |
| Disconnecting Means | Approved by UL for AC and DC load break as required by NEC Article 690 |
| Rapid Shutdown | Compliant per NEC-2014 & 2017 |

IV Curves vs. Irradiance (350W Module)

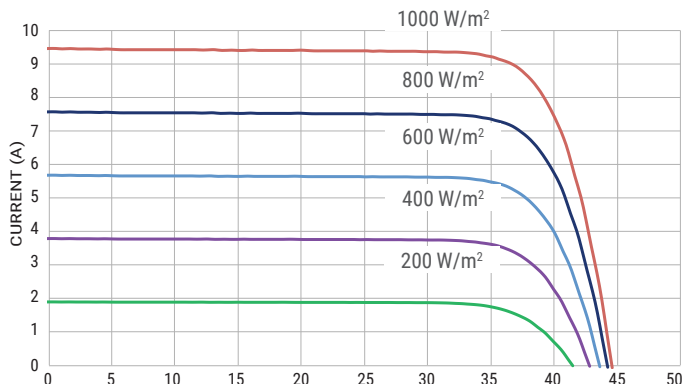

Comprehensive 25-Year Warranty

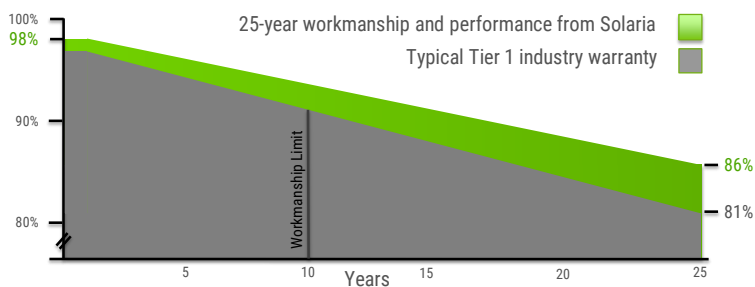

Mechanical Characteristics

| | |
|------------------------|-----------------------------|
| Cell Type | Monocrystalline Silicon |
| Dimensions (L x W x H) | 1621mm x 1116mm x 40mm |
| Weight | 22 kg / 48 lbs |
| Glass Type / Thickness | AR Coated, Tempered / 3.2mm |
| Frame Type | Black Anodized Aluminum |
| DC Cable Type / Length | Q DC / 815(+), 740mm(-) |
| AC Cable Type / Length | Q AC / 2000mm |
| Junction Box | IP67 / 4 diodes |
| Front Load (UL 1703) | 5400 Pa / 113 psf* |
| Rear Load (UL 1703) | 2400 Pa / 50 psf* |

* Refer to Solaria Installation Manual for details

Certifications / Warranty

| | |
|--------------------------|-------------------------------------|
| Certifications | UL 1703/UL1741/CEC CAN/CSA-C22.2 |
| NEMA | 3R |
| Fire Type | Type 1 |
| Power & Product Warranty | 25 years* |

* Warranty details at www.solaria.com

Packaging

| | |
|---------------------------|-------------------------|
| Stacking Method | Horizontal / Palletized |
| Pcs / Pallet | 25 |
| Pallet Dims | 1668 x 1150 x 1230 mm |
| Pallet Weight | 615 kg / 1360 lbs |
| Pallets / 40-ft Container | 28 |
| Pcs / 40-ft Container | 700 |

