



HIGHWAY

HT72-156M

HT72-156M(V) * V means 1500V module

355W-380W

Comprehensive and first-rate certification system

IEC61215:2016, IEC61730:2016 Latest Standard
ISO9001, ISO14001 and OHSAS18001, meeting the
highest international standards
Strict quality control



IEC 61215:2016
IEC 61730:2016



Advanced surface treatment, less surface reflection and 5BB cell design can reduce the series resistance and improve the module



19.6%
Module Efficiency



Designed for high voltage systems of up to 1500 VDC, increasing the string length of solar systems and saving on BoS costs



Certified to withstand dynamic mechanical load 1000 Pascal




Higher module's output power



PID resistant



Ammonia corrosion resistant
Salt Mist Corrosion resistant




Microcrack resistant
Triple EL tested of high quality control.



Entire module certified to withstand extreme wind (2400 Pa) and snow loads (5400 Pa)





Strict quality control, meeting the highest international standards: ISO 9001, ISO14001



All the modules are sorted and packaged by amperage, reducing mismatch losses and maximizing system output.

Engineering Drawing

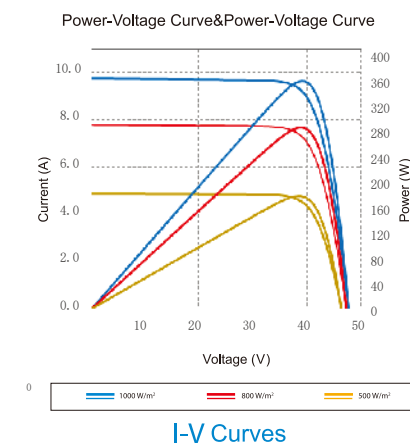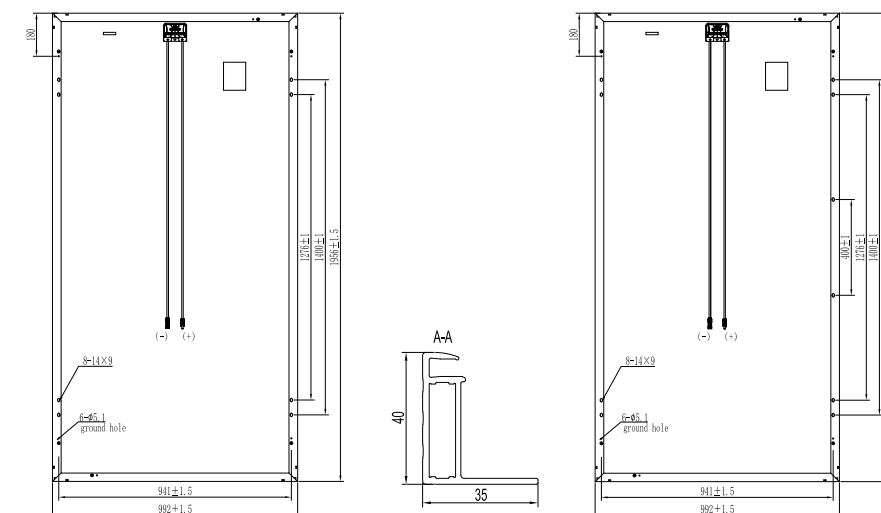

Electrical Characteristics

Module	HT72-156M / HT72-156M(V)					
Maximum Power at STC (Pmax)	355W	360W	365W	370W	375W	380W
Open-Circuit Voltage (Voc)	47.5V	47.7V	47.9V	48.1V	48.3V	48.5V
Short-Circuit Current (Isc)	9.69A	9.76A	9.83A	9.90A	9.97A	10.04A
Optimum Operating Voltage (Vmp)	38.7V	39.1V	39.5A	39.9V	40.3V	40.7V
Optimum Operating Current (Imp)	9.19A	9.23A	9.26A	9.30A	9.33A	9.36A
Module Efficiency	18.3%	18.6%	18.8%	19.1%	19.3%	19.6%
Power Tolerance	0 ~ +5W					
Maximum System Voltage	1000V/1500V DC (IEC)					
Maximum Series Fuse Rating	15A					
Operating Temperature	-40 °C to +85 °C					

STC: Irradiance 1000W/m², module temperature 25, AM=1.5
Optional black frame or white frame module according to customer requirements

NOCT

Module	HT72-156M / HT72-156M(V)					
Maximum Power	262W	266W	269W	273W	277W	280W
Open Circuit Voltage (Voc)	44.4V	44.6V	44.8V	45.0V	45.1V	45.3V
Short Circuit Current (Isc)	7.83A	7.88A	7.94A	8.00A	8.05A	8.11A
Maximum Power Voltage (Vmp)	36.1V	36.5V	36.9V	37.2V	37.6V	38.0V
Maximum Circuit Current (Imp)	7.25A	7.28A	7.30A	7.33A	7.35A	7.38A
NOCT	44 °C ± 2 °C					

NOCT: Irradiance 800W/m², ambient temperature 20 °C, wind speed 1 m/s

Mechanical Characteristics


Solar Cells	Monocrystalline 156.75 × 156.75mm
No. of Cells	72 (6 × 12)
Dimensions	1956 × 992 × 40mm (77.0 × 39.1 × 1.6in)
Weight	21.5kg (47.4lbs)
Front Glass	High transmission tempered glass
Frame	Anodized aluminium alloy
Junction Box	IP67
Cable	4mm² (IEC)
Connectors	MC4/MC4 Compatible
Packaging Configuration	26pcs/box, 672pcs/40'HQ Container

Temperature Characteristics

Temperature Coefficient of Pmax	γ (Pm)	-0.39%/K
Temperature Coefficient of Voc	β (Voc)	-0.29%/K
Temperature Coefficient of Isc	α (Isc)	0.049%/K

Warranty

10ys 10-year product warranty
25ys 25-year warranty on power output

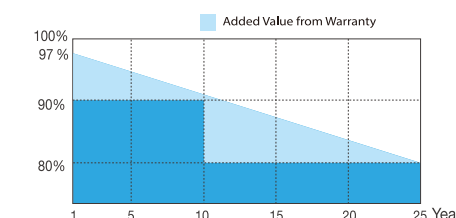

Information Box

Shanghai Aerospace Automobile
Electromechanical Co., Ltd.
Website: <http://htsolar.com.tr/>
Email: trinfo@ht-saae.com
Factory: HT SOLAR ENERJI
ANONIM SIRKETI
Lianyungang ShenZhou
New Energy Co., Ltd.