

# Solstice<sup>®</sup> Panel

## HALF-CELL 400W SOLAR MODULE

High performance, half-cell mono-crystalline 10BB 400W all-black modules produced using state of the art automated production lines and made using the highest quality materials and quality control standards.

### HALF-CELL MONOCRYSTALLINE TYPE

- CTM10400HC11-06

### FEATURES AND BENEFITS

#### High Quality / High Power


- 400W with black grid backsheet
- UL listed (61730-1, UL 61730-2)
- Positive power output tolerance

#### Limited Warranty\*

- 25-year linear power output warranty

\*See CertainTeed's limited warranty for details

### POWER OUTPUT WARRANTY

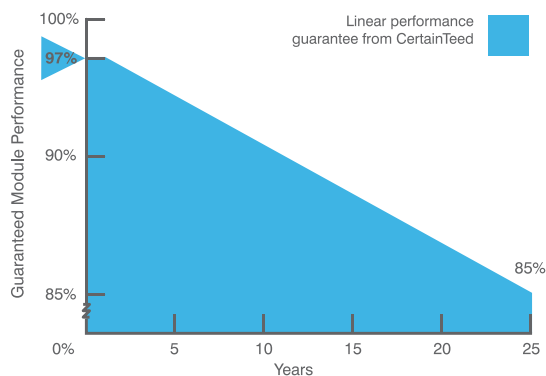

### OPERATING CONDITIONS

<b>Dimensions</b>	1722 x 1134 x 35 mm
<b>Nominal Operating Cell Temperature</b>	45 +/-2° C
<b>Operating Temperature</b>	-40 to 85° C
<b>Maximum System Voltage</b>	1,500V
<b>Fire Performance</b>	Class C / Type 1
<b>Maximum Wind Load</b>	112 lbs/ft <sup>2</sup> (5400 Pa)
<b>Maximum Snow Load</b>	112 lbs/ft <sup>2</sup> (5400 Pa)

## ELECTRICAL CHARACTERISTICS

Nominal Output (Pmpp)	W	400
Voltage at Pmax (Vmpp)	V	31.01
Current at Pmax (Impp)	A	12.90
Open Circuit Voltage (Voc)	V	37.04
Short Circuit Current (Isc)	A	13.79
Output Tolerance	W	-0 / + 5
No. of Cells & Connections		108 half-cells with 3 bypass diodes
Maximum Series Fuse Rating		25A
Cell Type		Monocrystalline
Module Efficiency	%	20.5
Temperature Coefficient of Pmpp	%/C	-0.35
Temperature Coefficient of Voc	%/C	-0.27
Temperature Coefficient of Isc	%/C	+0.05

## MECHANICAL CHARACTERISTICS

Glass	Glass: 3.2 high transmission, tempered
Frame	Anodized aluminum (Black)
Junction Box	IP68
Output Cables	4 mm <sup>2</sup> (12AWG) PV Wire, Length 1.2m (47.2")
Connectors	Polarized MC compatible
Weight	48.5 lbs (22 kg)

## DIMENSIONS

