

We Make Solar Evolve

EiTe MONO

Monocrystalline Module

ET-M672370WW/WB 370W

ET-M672365WW/WB 365W

ET-M672360WW/WB 360W

ET-M672355WW/WB 355W

ET-M672350WW/WB 350W

Rich Product Portfolio & Innovative Product Strategy, satisfy customer needs to the best, and keep the customers' overall costs to the lowest.



High Conversion Efficiency

Industry-leading processing techniques realize great module efficiency to a maximum of 19.07%, steady power output guaranteed.



Anti-reflective Coating and Reduce O&M Costs

Easier to clean by rainwater to remove dirt on the glass surface, making higher power output and lower maintenance costs.



0 to +5W

0 to +5W Positive Tolerance

Gain more power yields than expected.




Excellent Loading Capability

2400Pa wind loads, 5400Pa snow loads.
Durable and long-lasting.



Top-quality & Trustworthy Product

Rigorous Quality Management System built.
Multiple internationally recognized PV industry standard certifications attained.

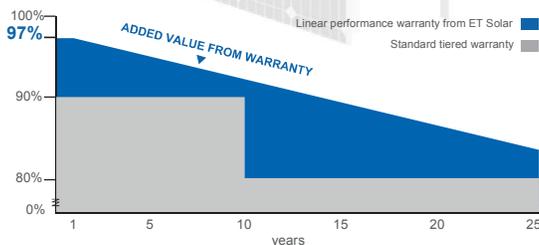

25 25-year performance warranty

10 10-year warranty on materials and workmanship

IEC 61215 Ed.2
IEC 61730
UL 1703



CONFORMS TO UL STD. 1702
CERTIFIED TO UL/GCRD STD.C 1703-1



www.etsolar.com

M/ET-PD-EN-US2019V1

ELECTRICAL SPECIFICATIONS (STC)

Model Type	ET-M672370WW	ET-M672365WW	ET-M672360WW	ET-M672355WW	ET-M672350WW
	ET-M672370WB	ET-M672365WB	ET-M672360WB	ET-M672355WB	ET-M672350WB
Peak Power (Pmax)	370W	365W	360W	355W	350W
Module Efficiency	19.07%	18.81%	18.55%	18.30%	18.04%
Maximum Power Voltage (Vmp)	39.70V	39.38V	39.05V	38.93V	38.51V
Maximum Power Current (Imp)	9.32A	9.27A	9.22A	9.12A	9.09A
Open Circuit Voltage (Voc)	48.45V	48.22V	47.96V	47.74V	47.64V
Short Circuit Current (Isc)	9.88A	9.77A	9.69A	9.65A	9.59A
Power Tolerance	0 to +5W				
Operating Temperature	- 40 ~ + 85°C				
Maximum System Voltage	DC 1000V				
Nominal Operating Cell Temperature	45±2°C				
Fire Safety	Class C				
Maximum Series Fuse Rating	15A				

ELECTRICAL SPECIFICATIONS (NOCT)

Model Type	ET-M672370WW	ET-M672365WW	ET-M672360WW	ET-M672355WW	ET-M672350WW
	ET-M672370WB	ET-M672365WB	ET-M672360WB	ET-M672355WB	ET-M672350WB
Peak Power (Pmax)	269.7W	266.4W	262.9W	259.0W	255.9W
Maximum Power Voltage (Vmp)	36.4V	36.3V	36.1V	35.8V	35.6V
Maximum Power Current (Imp)	7.41A	7.34A	7.28A	7.24A	7.18A
Open Circuit Voltage (Voc)	44.4V	44.2V	44.0V	43.8V	43.7V
Short Circuit Current (Isc)	7.97A	7.89A	7.82A	7.79A	7.74A

MECHANICAL SPECIFICATIONS

Cell Type	156.75mm x 156.75mm
Number of Cells	72 cells in series
Weight	22.5 kg (49.60 lbs)
Dimension	1956×992×40mm (77.01×39.06×1.58 inch)
Max Load	5400 Pascals (112 lb/ft ²)
Junction Box	≥IP67 rated
Connector	MC4 Compatible
Output cable	12AWG:PV Wire

TEMPERATURE COEFFICIENT


Temp. Coeff. of Isc (TK Isc)	0.05% /°C
Temp. Coeff. of Voc (TK Voc)	-0.30% /°C
Temp. Coeff. of Pmax (TK Pmax)	-0.42% /°C

PACKING MANNER

Container	40' HQ
Pieces per Pallet	26
Pieces per Container	572


PHYSICAL CHARACTERISTICS

Unit:mm (inch)

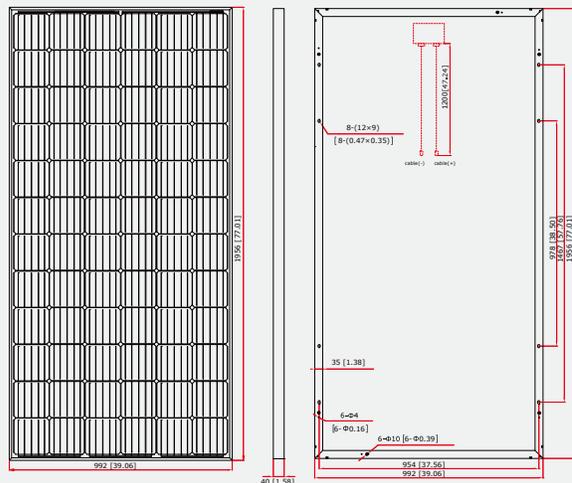


ELECTRICAL CHARACTERISTICS

Temperature Dependence of Isc, Voc and Pmax



Irradiance Dependence of Isc, Voc and Pmax (AM1.5, Cell Temperature 25°C)



Note: the specifications are obtained under the Standard Test Conditions (STCs): 1000 W/m² solar irradiance, 1.5 Air Mass, and cell temperature of 25°C. The NOCT is obtained under the Test Conditions: 800 W/m², 20°C ambient temperature, 1m/s wind speed, AM 1.5 spectrum.

Please contact support@etsolar.com for technical support. The actual transactions will be subject to the contracts. This parameters is for reference only and it is not a part of the contracts. The specifications are subject to change without prior notice.