

LUXPOWER® SERIES 5 390-410W Mono

M10/182mm Cell . 108 Half-Cell Layout

LUXPOWER® Series 5 solar modules stand out with the breakthrough innovation of M10 size (182mm) solar cells for the highest power generation and the lowest LCOE, which makes Series 5 the optimal choice for large solar power plants. The gallium-doped wafer technology empowers significantly the performance against LID and the latest integrated segmented ribbon technology increases the power output and enhances the module reliability for long-term use.



Gallium-doped Technology



Half Cut Cell Technology



MBB Technology



Anti-PID
Low LID
Performance




Less Hot Spot
Shading Effects



Lower BOS & LCOE

Linear performance Warranty

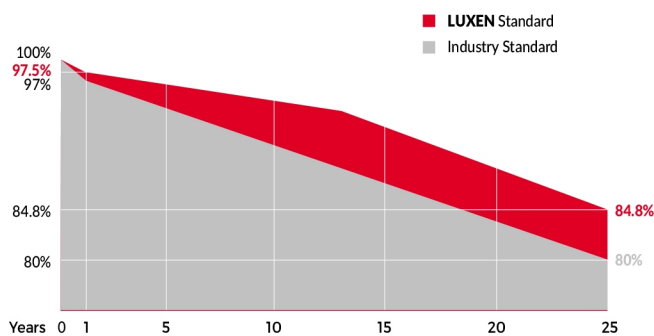

Comprehensive Certificates

- ISO9001:2015 QMS
- ISO14001:2015 EMS
- ISO45001:2018 OHSMS
- IEC61215/IEC61730 Standard quality



LUXEN SOLAR ENERGY CO., LTD.


Suzhou: A301,Zhongyi Building,Suzhou,Jiangsu,215168,China

Nantong: No.1,Haiyue Road,Nantong,Jiangsu,226000,China

T: +86 199 7499 5944 sales@luxensolar.com

MECHANICAL CHARACTERISTICS

Solar Cells	Mono
No. of Cells	108 (6x18)
Dimensions	1722 x 1134 x 35mm
Weight	21.0kgs
Front Glass	3.2mm coated tempered glass
Frame	Anodized aluminium alloy
Junction Box	Ip68 rated (3 by pass diodes)
Output Cables	4.0mm ² 300mm (+) / 400mm (-) Length can be customized
Connectors	Mc4 compatible
Mechanical load test	5400Pa

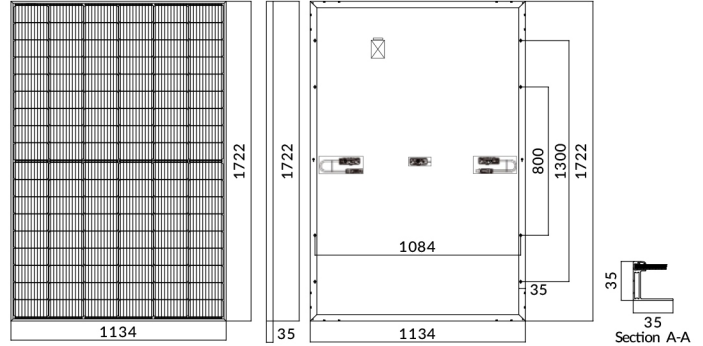

ELECTRICAL PARAMETERS


POWER CLASS	LNVB-390M		LNVB-395M		LNVB-400M		LNVB-405M		LNVB-410M	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum power (Pmax)	390W	294W	395W	298W	400W	302W	405W	306W	410W	310W
Open Circuit Voltage (Voc)	36.99V	34.97V	37.24V	35.25V	37.49V	35.54V	37.74V	35.82V	37.98V	36.10V
Short Circuit Current (Isc)	13.49A	10.81A	13.56A	10.85A	13.63A	10.89A	13.70A	10.93A	13.77A	10.97A
Voltage at Maximum power (Vmpp)	30.95V	28.85V	31.18V	29.13V	31.40V	29.41V	31.62V	29.68V	31.83V	29.95V
Current Maximum Power (Impp)	12.60A	10.19A	12.67A	10.23A	12.74A	10.27A	12.81A	10.31A	12.88A	10.35A
MODULE EFFICIENCY (%)	19.97%		20.23%		20.48%		20.74%		21.00%	

STC: Irradiance 1000W/m², cell temperature 25°C, AM1.5G NOCT: Irradiance 800W/m², ambient temperature 20°C, wind speed 1m/s, AM1.5G


PACKING CONFIGURATION

Container	20'GP	40'HQ
Pieces per pallet	31	31
Pallets per container	6	26
Pieces per container	186	806

I-V CURVE

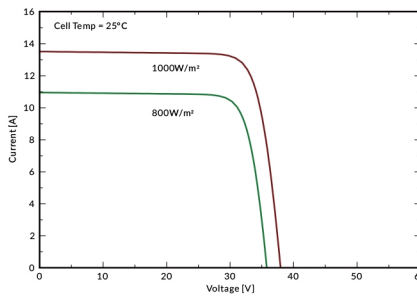

LNVB-405M/I-V

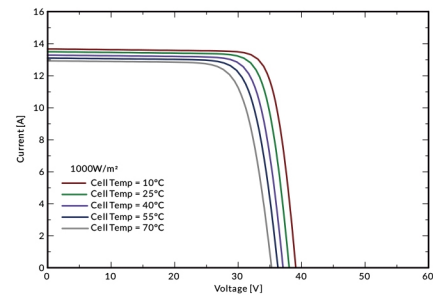

OPERATING CHARACTERISTICS

Operating Module Temperature	-40°C to +85°C
Maximum System Voltage	1500 DC (IEC)
Maximum Series Fuse Rating	25A
Power Tolerance	0/+5W

TEMPERATURE CHARACTERISTICS

Nominal Operating Temperature (Noct)	45±2°C
Temperature Coefficient of Pmax	-0.36%/°C
Temperature Coefficient of Voc	-0.28%/°C
Temperature Coefficient of Isc	+0.05%/°C

Note: Due to continuous technical innovation, R&D and improvement, technical data above mentioned may be of modification accordingly. LUXEN SOLAR have the sole right to make such modification at anytime without further notice.