


LG NeON[®] 2 Black


LG340N1K-L5 | LG345N1K-L5 | LG350N1K-L5



60

340W | 345W | 350W

The LG NeON[®] 2 is LG's best selling solar module and one of the most powerful and versatile modules on the market today. Featuring LG's Cello Technology™, the LG NeON[®] 2 L5 provides 3% more power output than our V5 models. The cells are designed to appear all-black at a distance, and the performance warranty guarantees 90.1% of labeled power output at 25 years.

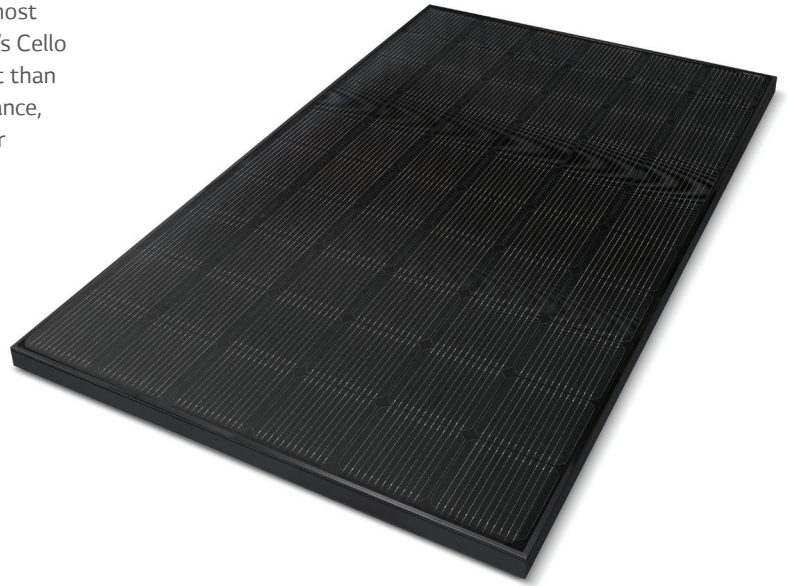

Features



Performance Warranty

LG NeON[®] 2 Black has a module performance warranty. At 25 years, the NeON[®] 2 is guaranteed to produce at least 90.1% of its labeled power output.



25-Year Limited Product Warranty

The NeON[®] 2 Black is covered by a 25-year limited product warranty. In addition, up to \$450 of labor costs will be covered in the rare case that a module needs to be repaired or replaced.



Solid Performance on Hot Days

LG NeON[®] 2 Black performs well on hot days due to its low temperature coefficient.



Roof Aesthetics

LG NeON[®] 2 Black has been designed with aesthetics in mind using thinner wires that appear all black at a distance.

When you go solar, ask for the brand you can trust: LG Solar

About LG Electronics USA, Inc.

LG Electronics is a global leader in electronic products in the clean energy markets by offering solar PV panels and energy storage systems. The company first embarked on a solar energy source research program in 1985, supported by LG Group's vast experience in the semi-conductor, LCD, chemistry and materials industries. In 2010, LG Solar successfully released its first MonoX[®] series to the market, which is now available in 32 countries. The NeON[®] (previous MonoX[®] NeON), NeON[®]2, NeON[®]2 BiFacial won the "Intersolar AWARD" in 2013, 2015 and 2016, which demonstrates LG's leadership and innovation in the solar industry.



LG NeON[®]2 Black

LG340N1K-L5 | LG345N1K-L5 | LG350N1K-L5

General Data

Cell Properties (Material/Type)	Monocrystalline/N-type
Cell Maker	LG
Cell Configuration	60 Cells (6 x 10)
Number of Busbars	12EA
Module Dimensions (L x W x H)	1,700mm x 1,016mm x 40 mm
Weight	18.0 kg
Glass (Material)	2.8mm/Tempered Glass with High Transmission Anti-Reflective Coating
Backsheet (Color)	Black
Frame (Material)	Anodized Aluminium
Junction Box (Protection Degree)	IP 68 with 3 Bypass Diodes
Cables (Length)	1,000mm x 2EA
Connector (Type/Maker)	MC 4/MC

Certifications and Warranty

Certifications	IEC 61215-1/-1-1/2:2016, IEC 61730-1/2:2016
	ISO 9001, ISO 14001, ISO 50001
	OHSAS 18001, UL 1703
Salt Mist Corrosion Test	IEC 61701:2012 Severity 6
Ammonia Corrosion Test	IEC 62716:2013
Hail Test	25mm (1") diameter at 23 m/s (52 mph)
Module Fire Performance	Type 2 (UL 1703)
Fire Rating	Class C (UL 790, ULC/ORD C 1703)
Solar Module Product Warranty	25 Year Limited
Solar Module Output Warranty	Linear Warranty*

*Improved: 1st year 98%, from 2-24th year: 0.33%/year down, 90.1% at year 25

Temperature Characteristics


NMOT*	[°C]	42 ± 3
Pmax	[%/°C]	-0.35
Voc	[%/°C]	-0.26
Isc	[%/°C]	0.03

*NMOT (Nominal Module Operating Temperature): Irradiance 800 W/m², Ambient temperature 20°C, Wind speed 1 m/s, Spectrum AM 1.5

Electrical Properties (NMOT)

Model		LG340N1K-L5	LG345N1K-L5	LG350N1K-L5
Maximum Power (Pmax)	[W]	255	259	263
MPP Voltage (Vmpp)	[V]	32.8	33.2	33.5
MPP Current (Impp)	[A]	7.78	7.80	7.83
Open Circuit Voltage (Voc)	[V]	38.8	38.9	39.0
Short Circuit Current (Isc)	[A]	8.32	8.35	8.38

I-V Curves

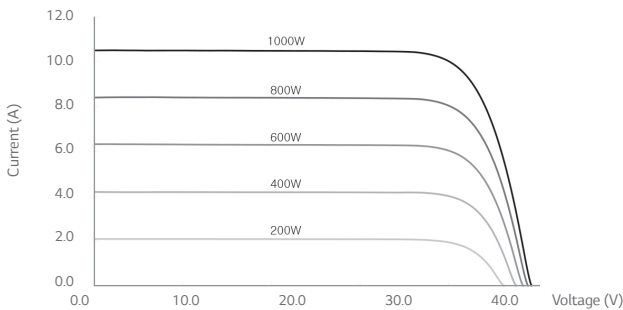

Electrical Properties (STC*)

Model		LG340N1K-L5	LG345N1K-L5	LG350N1K-L5
Maximum Power (Pmax)	[W]	340	345	350
MPP Voltage (Vmpp)	[V]	34.9	35.3	35.7
MPP Current (Impp)	[A]	9.75	9.78	9.81
Open Circuit Voltage (Voc ± 5%)	[V]	41.2	41.3	41.4
Short Circuit Current (Isc ± 5%)	[A]	10.35	10.39	10.43
Module Efficiency	[%]	19.7	20.0	20.3
Power Tolerance	[%]	0 ~ +3		

*STC (Standard Test Condition): Irradiance 1000 W/m², cell temperature 25°C, AM 1.5

**Measurement Tolerance of Pmax: ± 3%

Operating Conditions

Operating Temperature	[°C]	-40 ~ +90
Maximum System Voltage	[V]	1,000
Maximum Series Fuse Rating	[A]	20
Mechanical Test Load (Front)	[Pa/psf]	5,400/113
Mechanical Test Load (Rear)	[Pa/psf]	4,000/84


*Based on IEC 61215-2 : 2016 (Test Load = Design Load x Safety Factor (1.5))

**Mechanical Test Loads 6,000Pa/5,400Pa based on IEC 61215:2005

Packaging Configuration

Number of Modules per Pallet	[EA]	25
Number of Modules per 40' Container	[EA]	650
Number of Modules per 53' Container	[EA]	850
Packaging Box Dimensions (L x W x H)	[mm]	1750 x 1,120 x 1,221
Packaging Box Dimensions (L x W x H)	[in]	69 x 44.25 x 48.25
Packaging Box Gross Weight	[kg]	485
Packaging Box Gross Weight	[lb]	1,070

Dimensions (mm/inch)

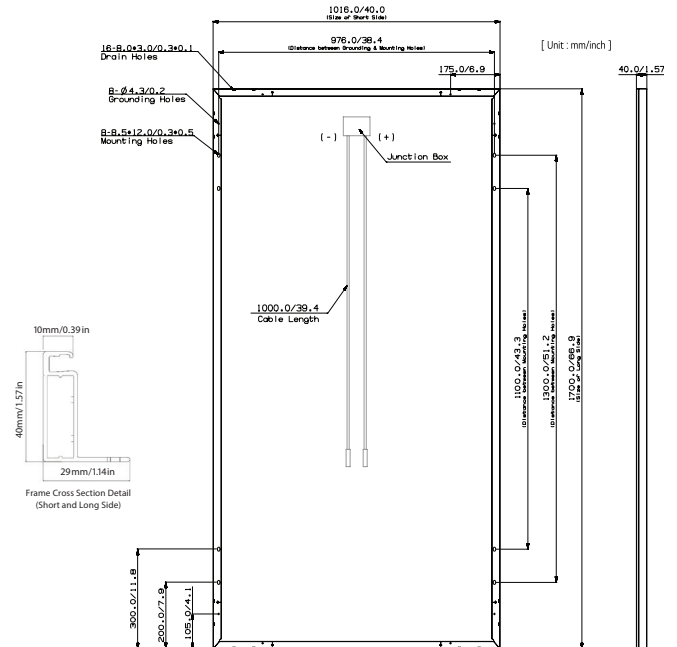

LG Electronics USA, Inc.
Solar Business Division
2000 Millbrook Drive
Lincolnshire, IL 60069
www.lg-solar.com

Product specifications are subject to change without notice.
LG340-350N1K-L5.pdf
052620

© 2020 LG Electronics USA, Inc. All rights reserved.